



NILFISK GWD 120 & GWD 220

WET/DRY INDUSTRIAL VACUUMS

Designed for heavy-duty use, the GWD 120 and GWD 220 wet/dry vacuums feature a stainless-steel collection tank and a “tip-and-pour” system to easily dispose of collected materials. The GWD 120 is a single-motor vac, while the GWD 220 has 2 motors for extra power. Both of these machines can be fitted with an upstream HEPA filter* for hazardous material collection.



Features and Benefits

- High-powered bypass motor(s) provide excellent performance, while maintaining low noise levels.
- Adjustable handle for easy storage and use
- Innovative float valve automatically shuts off vacuum when container is full
- Washable main sack filter
- Easy access to float basket and filters for cleaning and maintenance
- 50-foot yellow safety cord

Accessories

- Vacuum package comes standard with set of 1.5” (38mm) accessories. Dust bag and HEPA filter are optional.
- Please contact your designated District Manager or our Customer Service Department for a full list of accessories.


**HEPA filter for wet collection requires purchase of float chamber*



NILFISK GWD 120 & GWD 220

Data	Units	GWD 120	GWD 220
Voltage @ 60 Hz	volts	120	120
Type of Power	phases	1	1
Power	watts	1350	1800
Waterlift, max	inches, in H2O	88	80
Airflow, max	cfm	89	220
Filter Area, main	sq. inches	350	350
Filter Area, HEPA (upstream)	sq. inches	1007	1007
Noise Level @ 3' 3" (1 meter)	dB(A)	64	66
Tank Capacity, max*	gallons	20	20
Optional Dust Bag Capacity	gallons	9	9
Machine Inlet	in/mm	1.5/38	1.5/38
Dimensions (L x W x H)	inches	25.2 x 23.6 x39.4	25.2 x 23.6 x39.4
Weight	lbs.	48.5	50.7
Cord Length	ft.	50	50
HEPA Filter Efficiency (DOP-Tested)	%	99.99% @ 0.3 microns	99.99% @ 0.3 microns

*HEPA option will reduce wet collection capacity

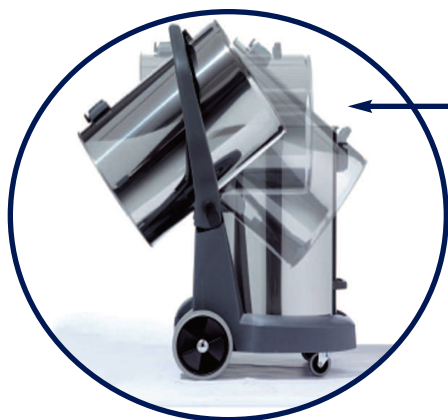

Easy "tip-and-pour" system